

PC100 防倒吸压力补偿滴灌带 (管)


PC100 Pressure Compensating Driptape (Dripline) with Anti-Siphon

特点 Features:

- PC100 压力补偿滴灌带 (管) 为一次性挤出成型, 内置压力补偿滴头, 无需再人工安装滴头, 铺设施工方便省力。
- 内镶压力补偿滴头带有迷宫流道, 结构科学, 硅胶片质量稳定, 压力补偿效果好。
- 内镶滴头自带超长过滤进水口, 抗堵塞性能好, 使用寿命长。
- 内镶滴头同时具有防倒吸功能, 防止杂物吸入流道, 可用于地埋灌溉。
- 内镶滴头制造偏差小, 出水流量均匀, 铺设长度长。
- 采用优质材料和先进生产工艺, 耐腐蚀, 抗老化, 经久耐用。
- PC100 Driptape (Dripline) produced by extrusion with PC emitter inside which save the time for installation.
- With new type of labyrinth passages, scientific structure, and good quality of silicon diaphragm for high efficient pressure compensating.
- Self-flushing system with wide filtration area of inlet improves the resistance of clogging for long life.
- Emitter has the function of Anti-siphon which can prevent the small varia into the channel of emitter, so this PC driptape can be used for SDI.
- With superior CV and excellent uniformity for long length of laying run.
- Produced by high quality material and advanced technology, better for anti-corrosion and anti-ageing.

应用 Application:

- 工作压力范围 0.5-3.5Bar。
- 推荐过滤等级: 120 目以上。
- 铺设整齐平直, 地面铺设出水口朝上。
- 适用丘陵和山地种植及多年生作物。
- Working pressure: 0.5-3.5Bar.
- Filtration Required: Above 120mesh.
- Lay in line and levelly, all the holes of emitter must be upward.
- Suitable for the planing on hills and mountains, or Sub-surface multi seasonal row crop.

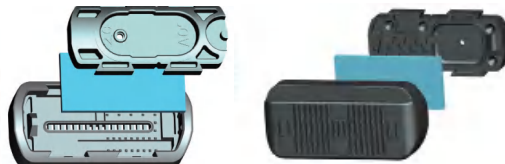

滴头规格 Specification of Emitter:

压力 VS 流量表 Pressure VS Flowing	压力 Pressure (Bar)	流量 Flow Rate (L/h)		
		1.0L/h	1.6L/h	2.0L/h
	0.5	1.02	1.55	1.95
	1.0	1.03	1.60	2.10
	2.0	1.05	1.65	2.15
	3.0	1.04	1.70	2.20
	3.5	1.01	1.62	2.10



1.0L/H




1.6L/H




2.0L/H


PC100 滴灌管 Dn16 规格 Specification for Dn16 PC dripline.

Picture	Item No.	Diameter (mm)	Thickness	Emitter Spacing (cm)	Flowing (L/H)	Package (m/roll)
	PCAS0116402010/16/20	16	0.4mm (16mil)	20	1.0/1.6/2.0	700
	PCAS0116403010/16/20			30		700
	PCAS0116404010/16/20			40		800
	PCAS0116405010/16/20			50		800
	PCAS0116603010/16/20	16	0.6mm (24mil)	30	1.0/1.6/2.0	500
	PCAS0116604010/16/20			40		500
	PCAS0116605010/16/20			50		500
	PCAS01166010010/16/20			100		500

PC100 滴灌管 Dn16 规格 Specification for Dn16 PC dripline.

Picture	Item No.	Diameter (mm)	Thickness	Emitter Spacing (cm)	Flowing (L/H)	Package (m/roll)
	PCAS0116802010/16/20	16	0.8mm (32mil)	20	1.0/1.6/2.0	500
	PCAS0116803010/16/20			30		500
	PCAS0116804010/16/20			40		500
	PCAS0116805010/16/20			50		500
	PCAS01168010010/16/20			100		500
	PCAS01161002010/16/20	16	1.0mm (40mil)	20	1.0/1.6/2.0	500
	PCAS01161003010/16/20			30		500
	PCAS01161004010/16/20			40		500
	PCAS01161005010/16/20			50		500
	PCAS011610010010/16/20			100		500

PC100 滴灌管 Dn20 规格 Specification for Dn20 Dripline:

Picture	Item No.	Diameter (mm)	Thickness	Emitter Spacing (cm)	Flowing (L/H)	Package (m/roll)
	PCAS01201002010/16/20	20	1.0mm (40mil)	20	1.0/1.6/2.0	300
	PCAS01201003010/16/20			30		300
	PCAS01201004010/16/20			40		300
	PCAS01201005010/16/20			50		300
	PCAS012010010010/16/20			100		300
	PCAS01201202010/16/20	20	1.2mm (48mil)	20	1.0/1.6/2.0	300
	PCAS01201203010/16/20			30		300
	PCAS01201204010/16/20			40		300
	PCAS01201205010/16/20			50		300
	PCAS012012010010/16/20			100		300

Dn16 最长铺设长度 Maximum Length of Run:

滴头流量 Flow Rate: 1.0L/h 地势平坦 Flat Terrain 前后流量偏差 Flowing Variation 10%						
进水压力 (Bar) Inlet Pressure	滴头间距 Spacing Between Emitters (cm) VS 铺设长度 Length Run (m)					
	20	30	40	50	100	
1.0	90	125	160	190	320	
1.5	110	155	200	235	405	
2.0	125	180	225	270	460	
2.5	135	195	250	300	510	
3.0	150	210	270	320	540	

滴头流量 Flow Rate: 1.6L/h 地势平坦 Flat Terrain 前后流量偏差 Flowing Variation 10%					
进水压力 (Bar) Inlet Pressure	滴头间距 Spacing Between Emitters (cm) VS 铺设长度 Length Run (m)				
	20	30	40	50	100
1.0	60	90	120	140	240
1.5	80	110	140	170	300
2.0	90	130	160	195	330
2.5	100	140	175	215	375
3.0	110	150	190	230	410

滴头流量 Flow Rate: 2.0L/h 地势平坦 Flat Terrain 前后流量偏差 Flowing Variation 10%					
进水压力 (Bar) Inlet Pressure	滴头间距 Spacing Between Emitters (cm) VS 铺设长度 Length Run (m)				
	20	30	40	50	100
1.0	55	80	100	120	200
1.5	70	95	125	150	250
2.0	80	110	140	170	285
2.5	85	120	155	185	320
3.0	90	130	165	200	345

Dn20 最长铺设长度 Maximum Length of Run:

滴头流量 Flow Rate: 1.0L/h 地势平坦 Flat Terrain 前后流量偏差 Flowing Variation 10%					
进水压力 (Bar) Inlet Pressure	滴头间距 Spacing Between Emitters (Cm) VS 铺设长度 Length Run (m)				
	20	30	40	50	100
1.0	150	210	260	300	490
1.5	180	260	320	370	610
2.0	210	290	360	430	700
2.5	230	320	400	470	780
3.0	250	340	430	510	850


滴头流量 Flow Rate: 1.6L/h 地势平坦 Flat Terrain 前后流量偏差 Flowing Variation 10%					
进水压力 (Bar) Inlet Pressure	滴头间距 Spacing Between Emitters (Cm) VS 铺设长度 Length Run (m)				
	20	30	40	50	100
1.0	110	150	190	220	360
1.5	130	180	230	270	450
2.0	150	210	260	320	520
2.5	170	240	290	350	570
3.0	190	270	310	380	620

滴头流量 Flow Rate: 2.0L/h 地势平坦 Flat Terrain 前后流量偏差 Flowing Variation 10%					
进水压力 (Bar) Inlet Pressure	滴头间距 Spacing Between Emitters (Cm) VS 铺设长度 Length Run (m)				
	20	30	40	50	100
1.0	90	130	160	190	320
1.5	110	160	200	240	390
2.0	130	180	230	270	450
2.5	150	200	250	300	500
3.0	160	220	270	320	540

管上式自清洗压力补偿滴头 Compact Online PC Dripper with Self-cleaning

特点 Features:

- 内置新一代迷宫式宽流道，全程自清洗，进水口带过滤格栅，抗堵塞性能好。
- 采用进口优质硅胶生产膜片，压力补偿效果好；同时稳定性强，使用寿命长。
- 使用 100% 优质塑料原料和添加剂生产，耐腐蚀，耐老化，抗紫外线强。
- 采用先进生产工艺，制造偏差 CV 小，确保每个滴头出水均匀。
- 结构紧凑，体积小，对田间机械作业影响小。
- 有 2 种出水口接头，带倒刺接头可直接接毛管用于 1 出 1 滴箭，节省配件，
- 安装方便；带承插接头可配合 1 出 4 或 1 出 2 滴箭套件。
- Wide and deep water passgers of labyrinth inside dripper and Continuous self- flushing improve clogging resistance.
- Diaphragm inside dripper made by excellent silicon gel is good for effect of pressure compensation and stability with long service life.
- Produced by Good Quality of Raw plastic material and additive insure anti-corrosion, anti-UV and anti-aging well.
- Adopting advanced production technology with very low CV, which ensure that the flowing of each dripper is nearly same.
- Uniform discharges as high efficiency of PC , which is good at irrigation for the area of undulating terrain.
- Compact structure with small volume, which is convenient for the operation of field machinery .
- With 2 different outlet, barb is suitable for one branch of Dripper stake, and nipple is connected with 2 or 4 branch dripper stake.
- No-Drain models can reduce the leakage of dipper in uneven terrain and overhead drip applications.

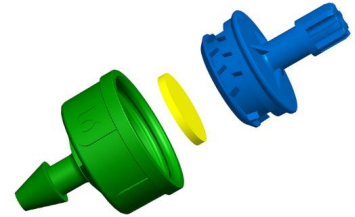

应用范围 Application:

- 有普通和防滴式二种规格：
- 普通款出水压力低，水头损失小，补偿范围 0.5-4.0Bar，主要用于大田灌溉，花卉，灌木，果树及园林景观。
- 防滴式封水压力为 0.15bar，补偿范围 0.7-4.0Bar，主要用于温室大棚等设施农业精准灌溉，确保开关时每个滴头出水一致；另外在坡度较大地方使用可避免低洼地积水。
- 现有 2L/h、4L/h、8L/h、12L/h 和 16L/h 五中流量选择，满足不同灌溉需求。
- 推荐过滤等级：120 目。
- Two type dripper available, Common and Anti-drain:
- Common type with low preesure of outlet flowing, small head lose and the range of PC is 0.5-4.0bar.Suitable for field irrigation, shrubbery,fruit tree and landscape.
- Anti-drain type seals at 0.15bar , and range of Pc is 0.7-4.0bar,Suitable for Greenhouse,nurseries and other precision irrigation, to sure that each dripper can be flowing and stopped in same time.
- Six different flowing available, 2L/h,4L/h,8L/h,12L/h and 16L/h to meet different requirement.
- Recommended filtration: 130 micron / 120 mesh.

技术参数 Technical Data:

压力 VS 流量曲线 Pressure VS Flow Curve	工作压力 Working Pressure (Bar)	流量 Flow Rate (L/h)				
		PCD0202B/N PCND0202B/N	PCD0204B/N PCND0204B/N	PCD0208B/N PCND0208B/N	PCD0212B/N PCND0212B/N	PCD0216B/N PCND0216B/N
	0.5	1.9	3.9	7.8	11.9	15.8
	0.7	2.0	4.0	7.9	12.1	16.1
	1.0	2.1	4.1	8.0	12.0	16.3
	2.0	2.1	4.2	8.2	12.2	15.9
	3.0	2.2	4.1	8.3	12.1	16.3
	4.0	2.1	4.0	8.1	12.3	16.2

管上式压力补偿滴头 PC Online Dripper

产品名称 Product Description	图片 Picture	货号 Item No.	流量 Size	每袋数量 Qty/Bag (Pc)	每箱数量 Qty/Ctn (Pc)	纸箱规格 Ctn Size (Cm)
普通式压力补偿滴头 Common PC Dripper		PCD0202B/N	2L/h	1000	12000	54*35*28
		PCD0204B/N	4L/h	1000	12000	54*35*28
		PCD0208B/N	8L/h	1000	12000	54*35*28
		PCD0212B/N	12L/h	1000	12000	54*35*28
		PCD0216B/N	16L/h	1000	12000	54*35*28
防滴式压力补偿滴头 No-drain PC Dripper		PCND0202B/N	2L/h	1000	12000	54*35*28
		PCND0204B/N	4L/h	1000	12000	54*35*28
		PCND0208B/N	8L/h	1000	12000	54*35*28
		PCND0212B/N	12L/h	1000	12000	54*35*28
		PCND0216B/N	16L/h	1000	12000	54*35*28

* 备注：货号后 B 代表 Bard，表示出水口为倒刺接头，货号后 N 代表 Nipple，表示出水口为承插接头。

* Note: Item No. with "B" means dripper with Barb outlet connection. "N" means dripper with Nipple connection.

大流量管上式压力补偿滴头 On-Line PC Bubblers




特点 Features:

- 内置新一代迷宫式宽流道，全程自清洗，进水口带过滤格栅，抗堵塞性能好。
- 采用进口优质硅胶生产膜片，压力补偿效果好；同时稳定性强，使用寿命长。
- 使用 100% 优质塑料原料和添加剂生产，耐腐蚀，耐老化，抗紫外线强。
- 采用先进生产工艺，制造偏差 CV 小，确保每个滴头出水均匀。
- 压力补偿效果好，确保在高低起伏地形也能出水均匀。
- Wide and deep water passageways of labyrinth inside dripper and Continuous self-flushing improve clogging resistance.
- Diaphragm inside dripper made by excellent silicone gel is good for effect of pressure compensation and stability with long service life.
- Produced by Good Quality of Raw plastic materials and additive insure anti-corrosion, anti-UV and anti-aging well.
- Adopting advanced production technology with very low CV, which is sure that the flowing of each dripper is nearly same.
- Uniform discharges as high efficiency of PC, It is good at irrigation for the area of undulating terrain.

应用范围 Application:

- 补偿范围 1.0-4.0Bar，适用于果树，灌木或园林景观，可替代微喷使用。
- 现有 25L/h,40L/h 二种流量选择，满足不同灌溉需求。
- 推荐过滤等级：120 目。
- Recommended filtration: 130 micron/ 120 mesh.
- Two flowing rate available, 25L/h and 40L/h to meet different requirement.
- The range of PC is 1.0-4.0bar. Suitable for field irrigation, shrubbery, fruit tree and landscape.




产品名称 Product Description	图片 Picture	货号 Item No.	规格 Size	每袋数量 Qty/Bag (Pc)	每箱数量 Qty/Ctn (Pc)	纸箱规格 Ctn Size (Cm)
大流量压力补偿滴头 PC Bubbler		PCD0225B/N	25L/h, Barb/Nipple	1000	12000	54*35*28
		PCD0240B/N	40L/h, Barb/Nipple	1000	12000	54*35*28
滴头导水帽 Cap for PC Bubbler		DM0225	Dn5	1000	20000	42*28*21
滴头支架 Stake for Bubbler		ST0135	Dn3*6	1000	4000	42*28*21

* 备注：货号后 B 代表 Barb，表示出水口为倒刺接头，货号后 N 代表 Nipple，表示出水口为承插接头

* Note: Item No. with "B" means dripper with Barb outlet connection, "N" mean with Nipple conn

技术参数 Technical Data:

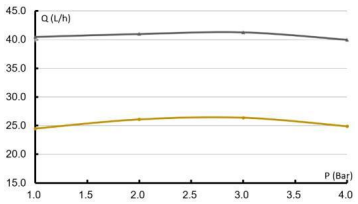压力 VS 流量曲线 Pressure vs Flow Curve	工作压力 Working Preaaure (Bar)		流量 Discharge(L/h)	
	PCD0225B/N	PCD0240B/N	PCD0225B/N	PCD0240B/N
	1.0	2.0	24.5	40.5
	2.0	3.0	26.1	41.0
	3.0	4.0	26.4	41.3
	4.0	4.0	24.9	40.0
喷洒直径 (m) Spray Diameter	1.1		1.7	

备注：离地 50cm，无风条件下测试 Note: Tested in breezeless, 50cm above the ground.



可拆式压力补偿滴头 Take Apart PC Dripper

特点 Features:

- 流量均匀，压力补偿效果好，可适用于地势起伏较大的坡地或丘陵地带。
- 滴头面盖可以打开，易于检查和清洗。
- 制造偏差 CV 小，确保每个滴头出水量一致。
- 采用优质塑料生产，耐化学腐蚀，抗紫外线，抗老化。
- Uniform discharges as high efficiency of PC, which is good at irrigation for the area of undulating terrain.
- This dripper can be opened to clean and check and can be used for long time.
- Low manufacturing CV values, the flow rate of each dripper is almost same.
- Produced by Good Quality of Raw plastic material with Anti-corrosion, Anti-UV and Anti-aging.


应用范围 Application:

- 压力补偿范围：0.7-3.5bar 过滤等级：120 目。
- 适用于果树，灌木丛，花圃及其他作物。
- 有 2L/h, 4L/h, 8L/h 三种流量选择，满足不同灌溉需求。
- Working Pressure: 0.7-3.5bar Filtration: Above 120mesh.
- Suitable for shrubbery, Flower garden, Fruit tree and other planting.
- Three type flowing available 2L/h, 4L/h and 8L/h to meet different requirement.



产品名称 Product Description	图片 Picture	货号 Item No.	规格 Size	每袋数量 Qty/Bag (Pc)	每箱数量 Qty/Ctn (Pc)	纸箱规格 Ctn Size (Cm)	毛重 G.W (Kg)
可拆式压力补偿滴头 Take Apart PC Dripper		PCT0102	2L/h	500	4500	54*35*28	17
		PCT0104	4L/h	500	4500	54*35*28	17
		PCT0108	8L/h	500	4500	54*35*28	17

技术参数 Technical Data:

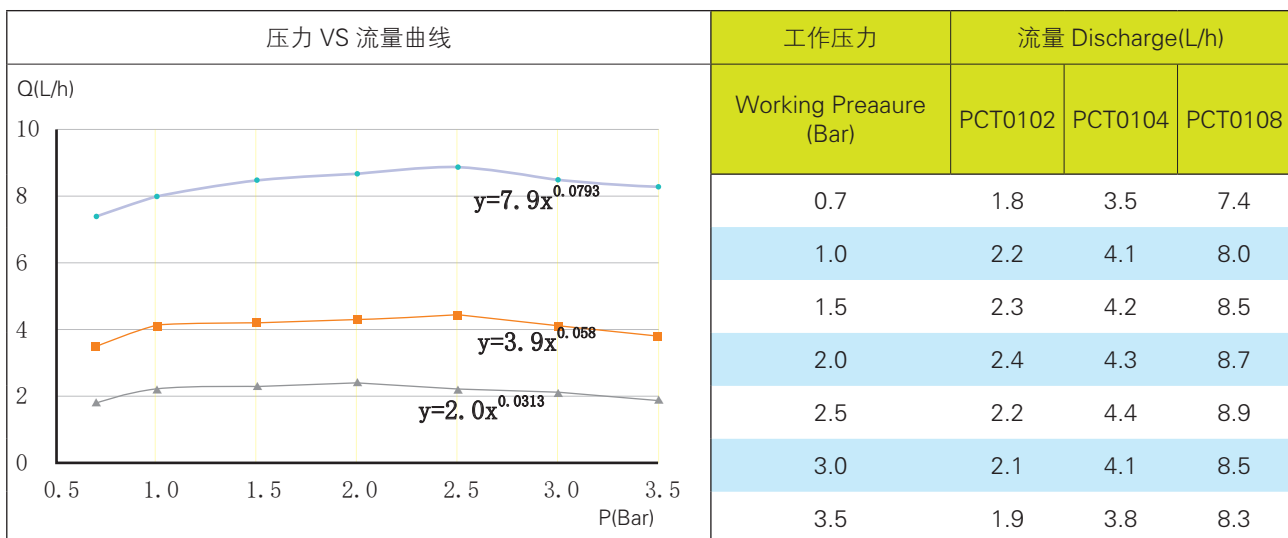

滴箭 / 插箭 Dripper Stake / Support Stake

特点 Features:




- 连接滴头，可插入土壤或栽培基质中固定导流。
- 滴箭带迷宫流道，水量分配均匀。
- 入水口自带过滤网格，抗堵塞性能强。
- 采用优质塑料，不易折断，耐化学腐蚀。
- Easy to fix the location in soil for irrigation with their stick.
- Turbulent flowing with the labyrinth of passageways, and uniform flowing.
- Good for clogging resistant with filter net inlet.
- Produced by good quality of plastic material with Anti-corrosion and not broken.



应用范围 Application:

- 工作压力: 0.2-2.0bar 过滤等级: 120 目。
- 有弯滴箭和加长弯滴箭两种规格可供选择, 满足不同作物需求。
- 与 Dn5/3PVC 毛管连接, 有 1 出, 2 出和 4 出 等多种组合。
- 适用于盆栽植物、苗木及立体绿化等作物灌溉。
- Working pressure: 0.2-2.0bar Minimum Filtration: 120mesh.
- Bending and super bending two type available to meet different requirement.
- Connecting with Dn5/3 PVC soft pipe with several combinatorial method.
- Suitable for shrubbery, Pottings and three-dimensional plantings.




产品名称 Product Description	图片 Picture	货号 Item No.	规格 Size	每袋数量 Qty/Bag (Pc)	每箱数量 Qty/Ctn (Pc)	纸箱规格 Ctn Size (Cm)	毛重 G.W (Kg)
插箭 Support Stake		2151	15Cm Length	散装 In Bulk	2500	66*31*40	12
短弯滴箭 Dripper Stake		2102	2.2L/h 10Cm Length	散装 In Bulk	5000	66*31*40	12
长弯滴箭 Dripper Stake		2152	2.2L/h 15Cm Length	散装 In Bulk	2500	66*31*40	8

技术参数 Technical Data:

货号 Item No.	工作压力 VS 流量 Working Preaure (Bar) VS Discharge(L/h) CV ≤ 5%										流态指数 Flow Index
	0.2Bar	0.4Bar	0.6Bar	0.7Bar	1.0Bar	1.2Bar	1.4Bar	1.6Bar	1.8Bar	2.0Bar	
2102	0.9	1.5	1.7	2.0	2.2	2.4	2.7	2.9	3.2	3.4	$Q=2.2H^{0.548}$
2152	0.9	1.4	1.7	2.0	2.2	2.4	2.6	2.7	2.9	3.1	$Q=2.2H^{0.516}$

滴箭套装 Dripper Stake Kits

产品名称 Product Description	图片 Picture	货号 Item No.	规格 Size	每袋数量 Qty/Bag (Pc)	每箱数量 Qty/Ctn (Pc)	纸箱规格 Ctn Size (Cm)	毛重 G.W (Kg)
一出插箭套装 1way Stake Kit		21511	50CM*1	10	1500	66*31*40	16
一出插箭套装配黑白 PE 管 1way Stake Kit with W/B PE pipe		W21511	50CM*1	10	1500	66*31*40	16
二出滴箭套装 2way Dripper Stake Kit		2122B	50CM*2 Dn4	10	700	66*31*40	12
二出滴箭套装配黑白 PE 管 2way Dripper Stake Kit with W/B PE pipe		W2122B	50CM*2 Dn5	10	400	66*31*40	6
四出滴箭套装 4way Dripper Stake Kit		2142B	50CM*4 Dn4	10	350	66*31*40	12
四出滴箭套装配黑白 PE 管 4way Dripper Stake Kit with W/B PE pipe		W2142B	50CM*4 Dn5	10	250	66*31*40	7
二出长滴箭套装 2way Long Dripper Stake Kit		21522B	50CM*2 Dn4	10	400	66*31*40	6
二出长滴箭套装配黑白 PE 管 2way Long Dripper Stake Kit with W/B PE pipe		W21522B	50CM*2 Dn5	10	400	66*31*40	6
四出长滴箭套装 4way Long Dripper Stake Kit		21524B	50CM*4 Dn4	10	200	66*31*40	8
四出长滴箭套装配黑白 PE 管 4way Long Dripper Stake Kit with W/B PE pipe		W21524B	50CM*4 Dn5	10	200	66*31*40	6

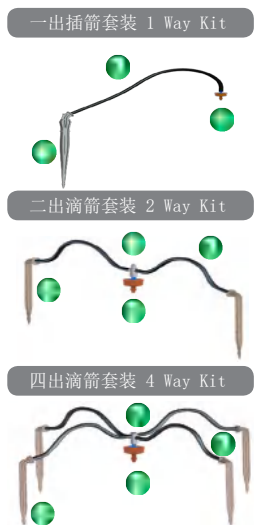

360° 可调式涌泉喷头 Adjustable Bubbler



特点 Features:

- 流量和灌溉范围可调节，旋转面盖可调节流量和喷洒覆盖面。
- 滴头面盖可以打开，易于检查和清洗。
- 其中 AOD0170B 带倒刺旁通，可直接打孔安排在 Dn12-32PE 管上，易于安装维护。
- 其中 AOD0170H 带地插，可以与 Dn5/3mmPVC(或 Dn6mmPE) 毛管联接，任意定点地插在作物附近。
- 采用优质塑料，耐化学腐蚀，抗紫外线，抗老化。
- Flowing and Spraying Radius can be adjusted by turning the cover of dripper.
- Easy to remove the cover of dripper for inspection and cleaning.
- Easy for installation, AOD0170B can be inserted onto Dn12-32mm PE pipe directly with its Barb offtake.
- AOD0170H can be connected with Dn5/3mm pvc (or Dn6mm PE) tubing and easy to stick near the planing with its spike .
- Produced by Good Quality of Raw plastic material with Anti-corrosion, Anti-UV and Anti-aging.

应用范围 Application:

- 流量调节范围广，可适用在地形起伏不定的灌溉区域。
- 适用于灌木丛，苗圃，果树及盆栽等作物。
- With large range of adjustment for flowing, good at irrigation of uneven terrain.
- Suitable for shrubbery, Nursery garden, Fruit tree, Pottings and other planting.



产品名称 Product Description	图片 Picture	货号 Item No.	规格 Size	每袋数量 Qty/Bag (Pc)	每箱数量 Qty/Ctn (Pc)	纸箱规格 Ctn Size (Cm)	毛重 G.W (Kg)
360° 可调式 涌泉喷头 Adjustable Bubbler		AOD0170B	0-70L/h@1Bar	500	8000	54*35*28	14
360° 可调式 地插涌泉喷头 Adjustable Bubbler with Spiker		AOD0170H	0-70L/h@1Bar 15cm Length	100	1200	54*35*28	9

360° 可调涡流喷头 Adjustable Flow Sprayer


特点 Features:

- 涡流全圆式喷洒，增添景观效果。
- 旋转面盖可调节流量和喷洒范围。
- 面盖可以打开，易于检查和清洗。
- 其中 AS0180B 带倒刺旁通，可直接打孔安排在 Dn12-32PE 管上，易于安装维护。
- 其中 AS0180H 带地插，可以与 Dn5/3mmPVC(或 Dn6mmPE) 毛管联接，任意定点地插在作物附近。
- 采用优质工程塑料，耐化学腐蚀，抗紫外线，抗老化。
- Full circle sprayer with fine water droplets, also beauty landscape.
- Flowing and Spraying Radius can be adjusted by turning the cover of sprayer.
- Easy to remove the cover of dripper for inspection and cleaning.
- Easy for installation, AS0180B can be inserted onto Dn12-32mm PE pipe directly with its Barb offtake .
- AS0180H can be connected with Dn5/3mm pvc (or Dn6mm PE) tubing and easy to stick near the planing with its spiker.
- Produced by Good Quality of Raw plastic material with Anti-corrosion, Anti-UV and Anti-aging.

应用范围 Application:

- 流量调节范围广，可适用在地形起伏不定的灌溉区域。
- 适用于灌木丛，苗圃，果树及盆栽等作物。
- With large range of adjustment for flowing, good at irrigation of uneven terrain.
- Suitable for shrubbery, Nursery garden, Fruit tree, Pottings and other planting.



产品名称 Product Description	图片 Picture	货号 Item No.	规格 Size	每袋数量 Qty/Bag (Pc)	每箱数量 Qty/Ctn (Pc)	纸箱规格 Ctn Size (Cm)	毛重 G.W (Kg)
360° 可调式 涡流喷头 Adjustable Flow Sprayer		AS0180B	0-80L/h@1Bar	500	6500	54*35*28	18
360° 可调式 地插涡流喷头 Adjustable Flow Sprayer with Spiker		AS0180H	0-80L/h@1Bar 15cm Length	100	1200	54*35*28	9

技术参数 Technical Data:

AOD0170B / AOD0170H						
齿数 Click	工作压力 VS 流量 Working Preaature (Bar) VS Discharge(L/h)					
	0.5Bar	1.0Bar	1.5Bar	2.0Bar	2.5Bar	3.0Bar
2	8	11	13	16	18	20
4	12	18	27	31	35	39
8	16	25	32	38	44	49
12	23	66	44	52	60	68
16	30	46	55	65	72	80
20	33	48	62	73	81	89
24	36	55	70	81	94	102
30	41	65	80	93	106	116
32	51	73	99	114	127	141
喷洒直径 Sprayer Diameter	0.1-1.6m / 0.1-1.9m					

* 备注: 16 齿 =1 圈 32 齿 =2 圈, 最大可调为 2 圈。

流量小于 12L/H 时滴水, 大于 12L/H 伞状出水。

* Note: 16click=1Turn 32click=2Turn Max Adjusting 2Turn.

Drip out when the flowing is less than 12L/h, Spary out when the flowing is more than 12L/h.

AS0180B / AS0180H						
齿数 Click	工作压力 VS 流量 Working Preaature (Bar) VS Discharge(L/h)					
	0.5Bar	1.0Bar	1.5Bar	2.0Bar	2.5Bar	3.0Bar
2	5	7	10	13	15	17
4	14	22	25	30	39	41
8	22	38	50	59	71	77
12	31	48	63	74	84	91
16	38	58	71	84	94	126
20	41	63	77	90	103	112
24	42	65	85	99	110	125
30	51	75	93	106	122	134
32	50	81	93	106	122	133
喷洒直径 Sprayer Diameter	0.1-2.2m / 0.1-2.8m					

* 备注: 16 齿 =1 圈 32 齿 =2 圈, 最大可调为 2 圈。

流量小于 14L/H 时滴水, 大于 14L/H 涡轮状喷洒。

* Note: 16click=1Turn 32click=2Turn Max Adjusting 2Turn.

Drip out when the flowing is less than 14L/h, Spary out when the flowing is more than 14L/h.

360° 压力补偿式涡流喷头 Full Circle PC Sprayer

特点 Features:

- 压力补偿式，在一定压力范围内流量保持稳定，无需再人工调整节量。
- 内置宽大流道和出水口，不易堵塞，使用寿命长。
- 采用优质硅胶片，出水均匀，流量稳定。
- 滴头上盖可以打开，便于检查和清洗。
- 采用优质工程塑料，耐化学腐蚀，抗紫外线，抗老化。
- 其中 ASPC0155B 带倒刺旁通，可直接打孔安排在 Dn12-32PE 管上，易于安装维护。
- 其中 ASPC0155H 带地插，可以与 Dn5/3mmPVC(或 Dn6mmPE) 毛管联接，可任意定点地插在作物附近。
- A Pressure Compensating sprayer with full circle diameter bubbler, Gentle spraying with uniform flow for all bubblers on same supply tube.
- With big passageway and outlet, anti-clogging with long life.
- Fixed with good quality of Silicon diaphragm so the effluent is uniform and the flow is stable.
- Easy to remove the cover of Bubbler for inspection and cleaning.
- Produced by good quality of raw plastic material with Anti-corrosion, Anti-UV and Anti-aging.
- ASPC0155B can be inserted into Dn12-32mm PE pipe directly with its Barb offtake, Easy for installation.
- ASPC0155H can be connected with Dn5/3mm pvc (or Dn6mm PE) tubing and easy to stick near the planing with its spike.



应用范围 Application:

- 压力调节范围广 (1-4Bar)，过滤等级：80 目以上。
- 适用于果树，灌木丛，苗圃及其他景观作物，及地形起伏不平的灌溉区域。
- With large range of pressure compensation (1-4Bar), Filtration above 80mesh.
- Suitable for fruit tree, shrubbery, Flower garden, Pottings and other plantings on uneven terrain.

产品名称 Product Description	图片 Picture	货号 Item No.	规格 Size	每袋数量 Qty/Bag (Pc)	每箱数量 Qty/Ctn (Pc)	纸箱规格 Ctn Size (Cm)
压力补偿式涡流喷头 Full Circle PC Sprayer		ASPC0135B	35L/h, Barb	500	6000	54*35*28
		ASPC0155B	55L/h, Barb	500	6000	54*35*28
		ASPC0135S	35L/h	500	4000	54*35*28
		ASPC0155S	55L/h	500	4000	54*35*28
		ASPC0135H	35L/h, 20cm Height Stake	100	1200	54*35*28
		ASPC0155H	55L/h, 20cm Height Stake	100	1200	54*35*28
		ASPC0135F	35L/h, 20cm Height Stake	100	1200	54*35*28
		ASPC0155F	55L/h, 20cm Height Stake	100	1200	54*35*28

技术参数 Technical Data:

压力 对应 流量和射程直径 Working Pressure VS Flowing and Spraying Diameter					
货号 Item No.	工作压力 Working Pressure	1.0Bar	2.0Bar	3.0Bar	4.0Bar
ASPC0135B/S/H/F	Discharge	33L/h	34L/h	35L/h	34L/h
	Spraying Diameter	0.8m	1.0m	1.1m	1.1m
ASPC0155B/S/H/F	Discharge	50L/h	55L/h	54L/h	53L/h
	Spraying Diameter	1.4m	2.2m	2.0m	1.4m

*备注 离地15cm, 无风条件下测试 Note: Tested in breezeless, 15cm above the ground.

